



PUMP MANUFACTURING, INC.

4849 Cranswick Rd. Houston, TX 77041


sales@amcopumps.com www.amcopumps.com 281.739.1003

Amco 100 4" Pump Specifications


At Amco, we put customer satisfaction first. We offer high-quality, high-efficiency pumps at competitive prices, making us an easy choice for your pump solutions. We stand behind our pumps, offering a **2-year warranty** and customer support that will **respond within 24 hours** of your inquiry.

The Amco100 autoprime trash pump generates flow rates up to 1050 US gpm and has capacity to handle solids up to 2" in diameter.

Our pump is ideal for dewatering, bypass, and many other applications. The Amco100 automatically primes up to 28' of suction lift from dry. Complete with a liquid bath mechanical seal, this pump can dry-run for extended periods of time.

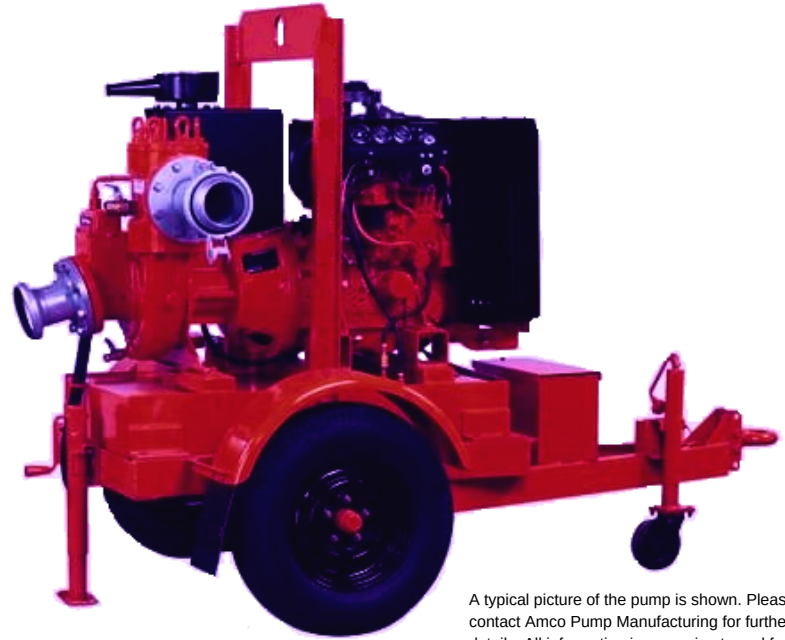

A typical picture of the pump is shown. Please contact Amco Pump Manufacturing for further details. All information is approximate and for general guidance only.

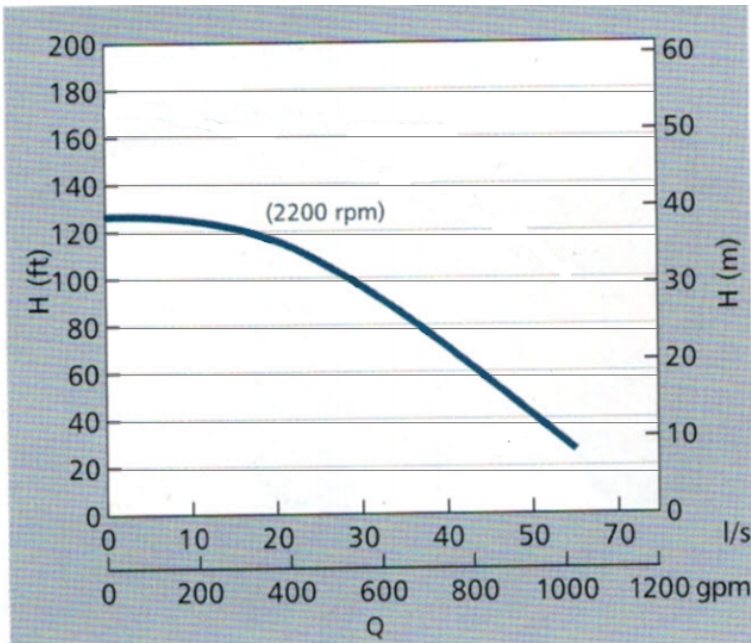

SPECIFICATIONS

Engine	Isuzu 4LE2T Tier 4 Final
Max. Flow	1050 US gpm
Max. Solid Handling	2"
Suction Connection	4"
Delivery Connection	4"
Max. Operating Temperature	170° F
Diesel Tank	50 Gallons
Max. Head	130 feet
Max. Operating Speed	2400 rpm
Consumed power	48 hp
Dry run capacity	YES

- Centrifugal pump coupled to a diesel engine
- **Safe for dry-run** applications
- **Continuous** Venturi priming
- **Durably constructed** using cast iron and steel
- **Numerous applications**; the pump handles sewage, slurries, and liquids with solids up to 3" in diameter!
- **Minimal maintenance**, typically limited to checking fluid levels and filters

